TO-92 Plastic-Encapsulate Transistors

Features

- Power dissipation
- TRANSISTOR (NPN)

MECHANICAL DATA

- Case style:TO-92 molded plastic
- Mounting position:any

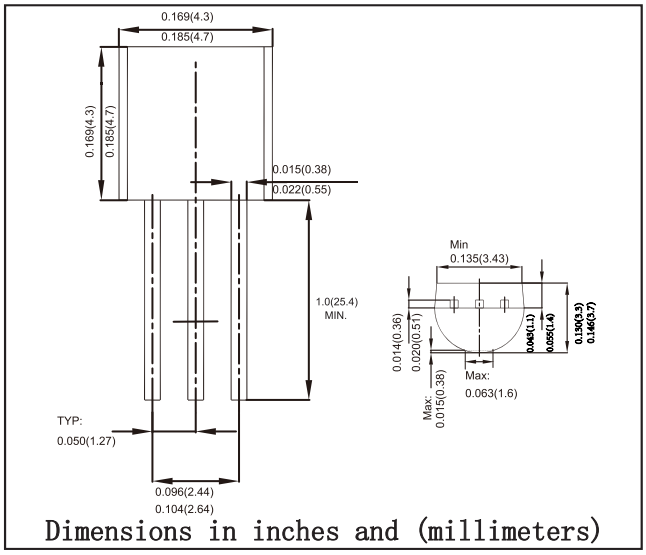

MAXIMUM RATINGS AND CHARACTERISTICS

@ 25°C Ambient Temperature (unless otherwise noted)

Symbol	Parameter		Value	Unit
V_{CBO}	Collector-Base Voltage	BC337	50	V
		BC338	30	
V_{CEO}	Collector-Emitter Voltage	BC337	45	V
		BC338	25	
V_{EBO}	Emitter-Base Voltage		5	V
I_C	Collector Current -Continuous		800	mA
P_D	Total Device Dissipation		625	mW
T_j	Junction Temperature		150	℃
T_{stg}	Storage Temperature		-55-150	℃

ORDERING INFORMATION

Part Number	Package	Packing Method	Pack Quantity
BC337	TO-92	Bulk	1000pcs/Bag
BC337-TA	TO-92	Tape	2000pcs/Box
BC338	TO-92	Bulk	1000pcs/Bag
BC338-TA	TO-92	Tape	2000pcs/Box

Parameter	Symbol	Test conditions	MIN	TYP	MAX	UNIT
Collector-base breakdown voltage	V_{CBO}	I_C= 100uA, I_E=0				
BC337			50			V
BC338			30			V
Collector-emitter breakdown voltage		I_C= 10mA , I_B=0				
BC337	V_{CEO}		45			V
BC338			25			V
Emitter-base breakdown voltage	V_{EBO}	I_E= 10uA, I_C=0	5			V
Collector cut-off current BC337	I_{CBO}	V_{CB}= 45V, I_E=0			0.1	uA
BC338		V_{CB}= 25V, I_E=0			0.1	
Collector cut-off current BC337	I_{CEO}	V_{CE}= 40V, I_B=0			0.2	uA
BC338		V_{CE}= 20V, I_B=0			0.2	
Emitter cut-off current	I_{EBO}	V_{EB}= 4 V, I_C=0			0.1	uA
BC337/BC338			100		630	
BC337-16/BC338-16	$h_{FE(1)}$	V_{CE}=1V, I_C= 100mA	100		250	
BC337-25/BC338-25			160		400	
BC337-40/BC338-40			250		630	
DC current gain	$h_{FE(2)}$	V_{CE}=1V, I_C= 300mA	60			
Collector-emitter saturation voltage	$V_{CE(sat)}$	I_C=500mA, I_B= 50mA			0.7	V
Base-emitter saturation voltage	$V_{BE(sat)}$	I_C= 500mA, I_B=50mA			1.2	V
Base-emitter voltage	V_{BE}	V_{CE}=1V, I_C= 300mA			1.2	V
Transition frequency	f_T	V_{CE}= 5V, I_C= 10mA f = 100MHz	210			MHz
Collector Output Capacitance	Cob	V_{CB}=10V,I_E=0 f=1MHZ		15		pF

Type	BC337	BC338
Marking	BC337	BC338

RATINGS AND CHARACTERISTIC CURVES

Typical Characterisitics

Static Characteristic

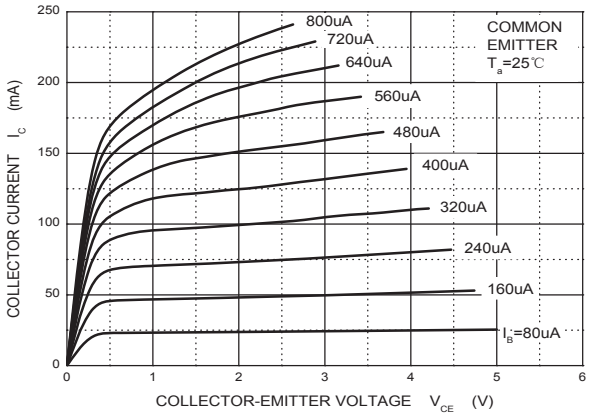

h_{FE} —— I_C

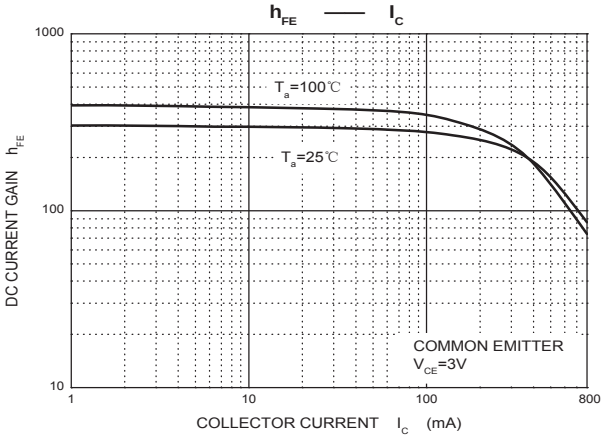

V_{CEsat} —— I_C

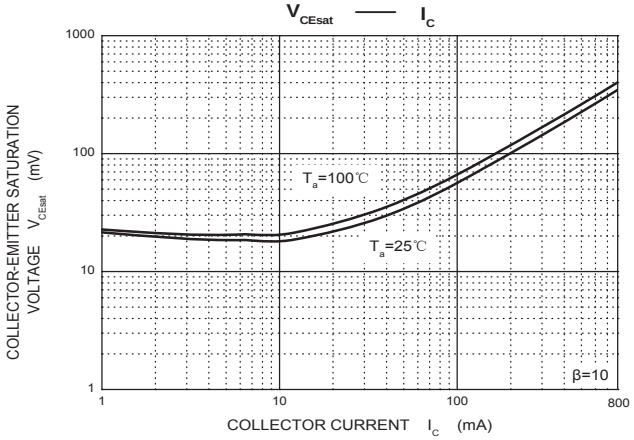

V_{BEsat} —— I_C

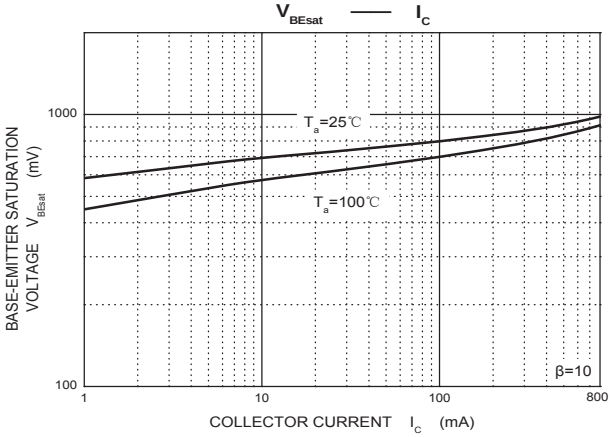

f_T —— I_C

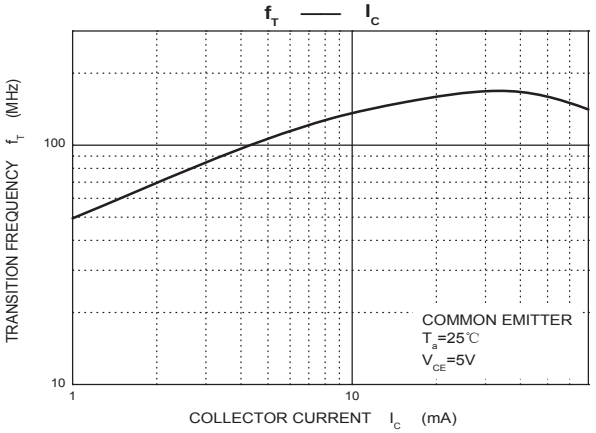

C_{ob}/ C_{ib} —— V_{CB}/ V_{EB}

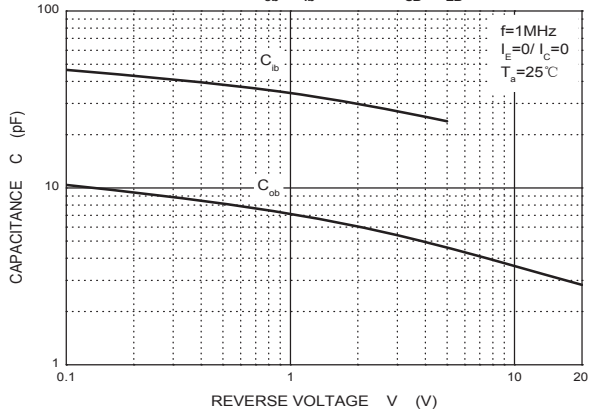

P_C —— T_a