

PLASTIC SILICON RECTIFIERS


VOLTAGE RANGE: 50 --- 1000 V CURRENT:3.0 A

FEATURES

- Plastic package has Underwriters Laboratory
- Flammability Classification 94V-0
- For surface mount applications
- Low profile package
- Built-in strain relief, ideal for automated placement
- Glass passivated chip junction
- High temperature soldering: 260°C/10 seconds at terminals

MECHANICAL DATA

- Case: JEDEC SMA(DO-214AC) molded plastic body over passivated chip
- Terminals: Solder plated, solderable per MIL-STD-750, Method 2026
- Polarity: Color band denotes cathode end

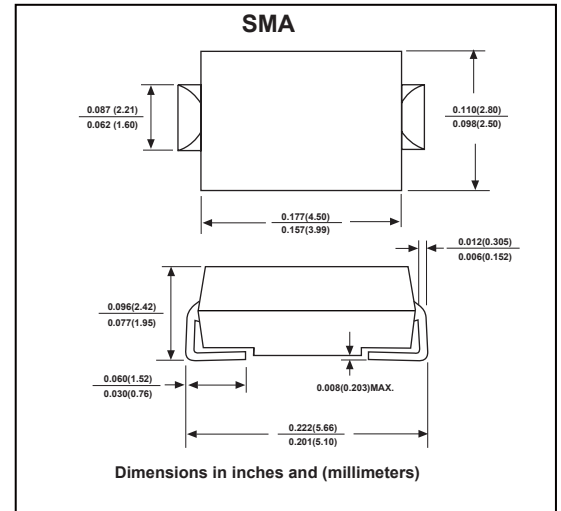

MAXIMUM RATINGS AND CHARACTERISTICS

@ 25°C Ambient Temperature (unless otherwise noted) Single phase, half wave, 60 Hz, resistive or inductive load.

For capacitive load, derate by 20%.

	SYMBOLS	S3A	S3B	S3D	S3G	S3J	S3K	S3M	UNITS
Device marking code		SA	SB	SD	SG	SJ	SK	SM	
Maximum recurrent peak reverse voltage	V_{RRM}	50	100	200	400	600	800	1000	Volts
Maximum RMS voltage	V_{RMS}	35	70	140	280	420	560	700	Volts
Maximum DC blocking voltage	V_{DC}	50	100	200	400	600	800	1000	Volts
Maximum average forward rectified current at $T_L=75^\circ\text{C}$ (NOTE 3)	$I_{(AV)}$	3.0							Amps
Peak forward surge current 8.3ms single half sine-wave superimposed on rated load (JEDEC Method) $T_L=75^\circ\text{C}$	I_{FSM}	100.0							Amps
Maximum instantaneous forward voltage at 2.5A	V_F	1.15							Volts
Maximum DC reverse current at rated DC blocking voltage $T_A=25^\circ\text{C}$ $T_A=125^\circ\text{C}$	I_R	10.0 250.0							μA
Typical reverse recovery time (NOTE 1)	t_{rr}	2.5							μs
Typical junction capacitance (NOTE 2)	C_J	60.0							pF
Typical thermal resistance (NOTE 3)	$R_{\theta JA}$ $R_{\theta JL}$	47.0 13.0							$^\circ\text{C/W}$
Operating junction and storage temperature range	T_J, T_{STG}	-55 to +150							$^\circ\text{C}$

NOTES:

- (1) Reverse recovery test conditions: $I_F=0.5\text{A}$, $I_R=1.0\text{A}$, $I_{rr}=0.25\text{A}$
- (2) Measured at 1.0 MHz and applied reverse voltage of 4.0 Volts
- (3) Thermal resistance from junction to ambient and from junction to lead mounted on P.C.B. with 0.3×0.3 " ($8.0 \times 8.0\text{mm}$) copper pad areas



RATINGS AND CHARACTERISTIC CURVES

